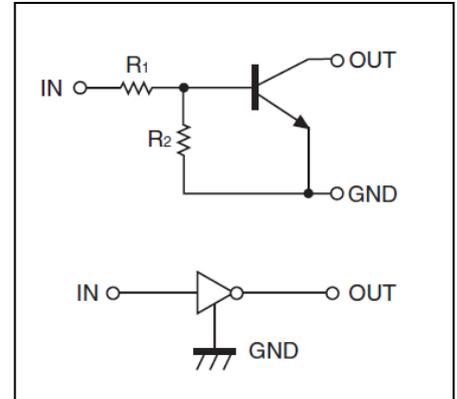


## Digital Transistors (Built-in Resistors)





### • Equivalent Circuit DIGITAL TRANSISTOR (NPN)

#### FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



#### PIN CONNENCTIONS and MARKING

<b>DTC143XE</b> 	<b>SOT-523</b>  1. IN 2. GND 3. OUT	<b>DTC143XUA</b> 	<b>SOT-323</b>  1. IN 2. GND 3. OUT
<b>DTC143XKA</b> 	<b>SOT-23-3L</b>  1. IN 2. GND 3. OUT	<b>DTC143XCA</b> 	<b>SOT-23</b>  1. IN 2. GND 3. OUT

#### ORDERING INFORMATION

Part Number	MARKING	Package	Packing Method	Pack Quantity
DTC143XE	<b>43</b>	SOT-523	Reel	3000pcs/Reel
DTC143XUA	<b>43</b>	SOT-323	Reel	3000pcs/Reel
DTC143XKA	<b>43</b>	SOT-23-3L	Reel	3000pcs/Reel
DTC143XCA	<b>43</b>	SOT-23	Reel	3000pcs/Reel

**MAXIMUM RATINGS(Ta=25°C unless otherwise noted)**

Symbol	Parameter	Limits(DTC143X□)				Unit
		E	UA	CA	KA	
V <sub>CC</sub>	Supply Voltage	50				V
V <sub>IN</sub>	Input Voltage	-7~+20				V
I <sub>O</sub>	Output Current	100				mA
P <sub>D</sub>	Power Dissipation	150	200	200	200	mW
T <sub>J</sub> ,T <sub>stg</sub>	Operation Junction and Storage Temperature Range	-55~+150				°C

**ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)**

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	V <sub>I(off)</sub>	V <sub>CC</sub> =5V,I <sub>O</sub> =100μA	0.3			V
	V <sub>I(on)</sub>	V <sub>O</sub> =0.3V,I <sub>O</sub> =20mA			2.5	V
Output voltage	V <sub>O(on)</sub>	I <sub>O</sub> /I <sub>I</sub> =10mA/0.5mA		0.1	0.3	V
Input current	I <sub>I</sub>	V <sub>I</sub> =5V			1.8	mA
Output current	I <sub>O(off)</sub>	V <sub>CC</sub> =50V,V <sub>I</sub> =0			0.5	μA
DC current gain	G <sub>I</sub>	V <sub>O</sub> =5V,I <sub>O</sub> =10mA	30			
Input resistance	R <sub>1</sub>		3.29	4.7	6.11	kΩ
Resistance ratio	R <sub>2</sub> /R <sub>1</sub>		1.7	2.1	2.6	
Transition frequency	f <sub>T</sub>	V <sub>O</sub> =10V,I <sub>O</sub> =5mA,f=100MHz		250		MHz

**Typical Characteristics**
