


Surface Mount Schottky Barrier Diode

Features

- High breakdown voltage
- Low forward voltage
- Surface mount device




SOT-23 Plastic Package

BAT46 Marking Code: **S46**

BAT46A Marking Code: **A46**

BAT46C Marking Code: **C46**

BAT46S Marking Code: **B46**





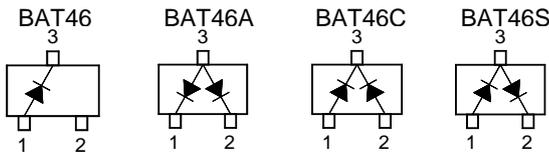


Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

| Parameter | Symbol | Value | Unit |
|--|-------------|---------------|------------------|
| Repetitive Peak Reverse Voltage | V_{RRM} | 100 | V |
| Continuous Forward Current | $I_{F(AV)}$ | 150 | mA |
| Repetitive Peak Forward Current (at $t_p < 1\text{ s}$) | I_{FRM} | 350 | mA |
| Surge Forward Current (at $t_p < 10\text{ ms}$) | I_{FSM} | 750 | mA |
| Operating Temperature Range | T_j | 150 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | - 55 to + 150 | $^\circ\text{C}$ |

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|---|-------------|------|----------|--|---------------|
| Reverse Breakdown Voltage at $I_R = 100\text{ }\mu\text{A}$ | $V_{(BR)R}$ | 100 | - | - | V |
| Forward Voltage at $I_F = 0.1\text{ mA}$ at $I_F = 10\text{ mA}$ at $I_F = 250\text{ mA}$ | V_F | - | - | 0.25 0.45 1 | V |
| Reverse Current at $V_R = 1.5\text{ V}$ at $V_R = 10\text{ V}$ at $V_R = 50\text{ V}$ at $V_R = 75\text{ V}$ at $V_R = 1.5\text{ V}, T_j = 60\text{ }^\circ\text{C}$ at $V_R = 10\text{ V}, T_j = 60\text{ }^\circ\text{C}$ at $V_R = 50\text{ V}, T_j = 60\text{ }^\circ\text{C}$ at $V_R = 75\text{ V}, T_j = 60\text{ }^\circ\text{C}$ | I_R | - | - | 0.5 0.8 2 5 5 7.5 15 20 | μA |
| Total Capacitance at $V_R = 0\text{ V}, f = 1\text{ MHz}$ at $V_R = 1\text{ V}, f = 1\text{ MHz}$ | C_{tot} | - | 20 12 | - | pF |

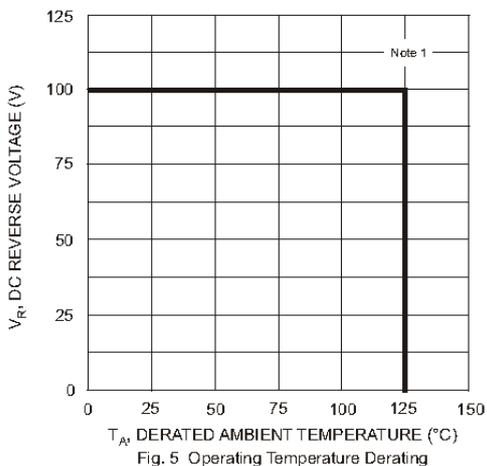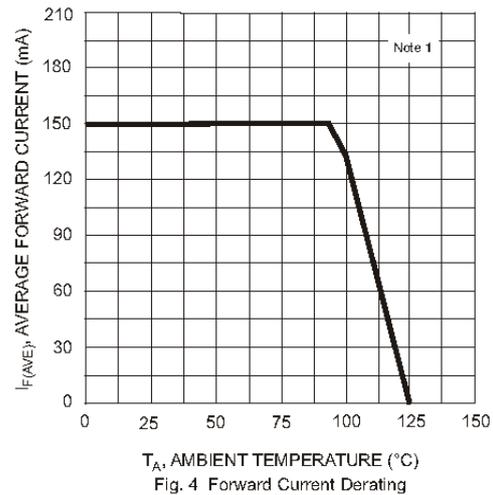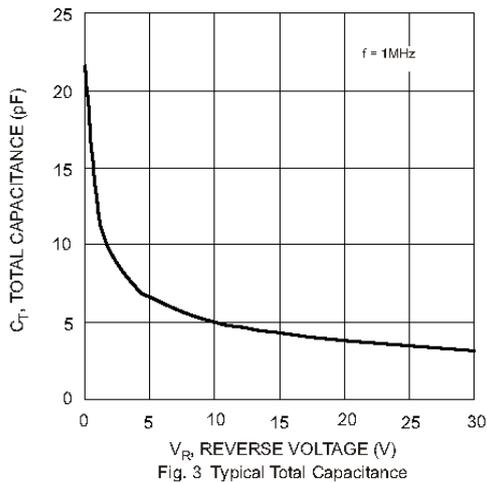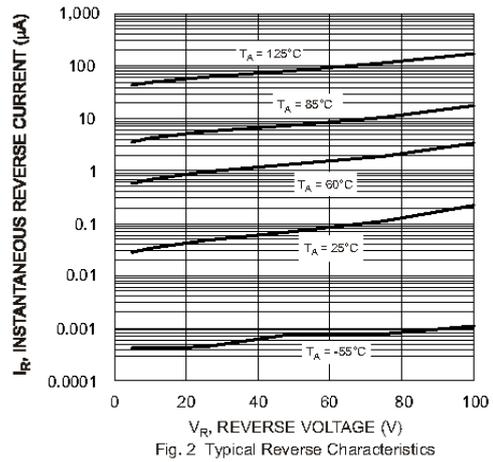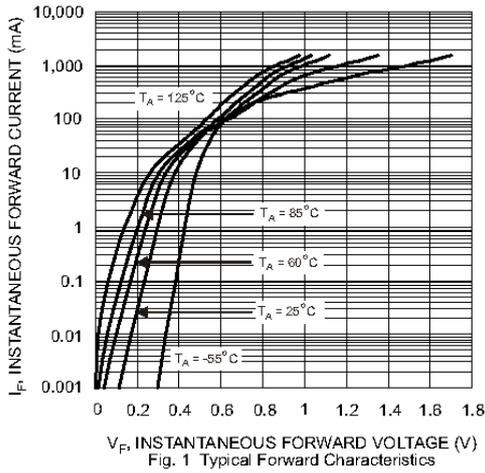

Note 1: Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.