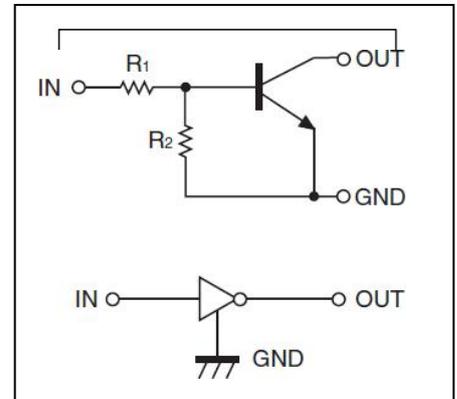


Digital Transistors (Built-in Resistors)





• Equivalent Circuit DIGITAL TRANSISTOR (NPN)

FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



PIN CONNENCTIONS and MARKING

DTC143ZE  1. IN 2. GND 3. OUT	SOT-523	DTC143ZUA  1. IN 2. GND 3. OUT	SOT-323
DTC143ZKA  1. IN 2. GND 3. OUT	SOT-23-3L	DTC143ZCA  1. IN 2. GND 3. OUT	SOT-23

ORDERING INFORMATION

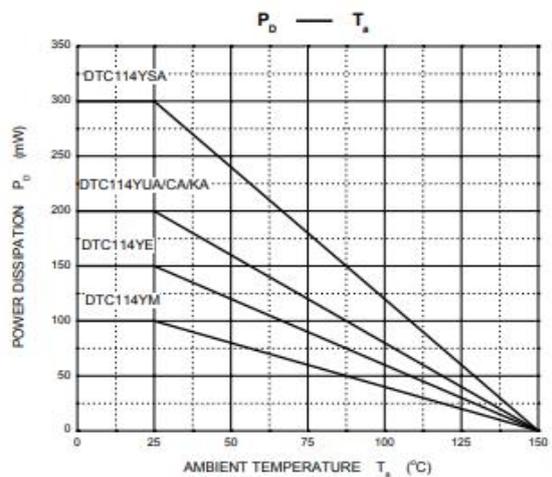
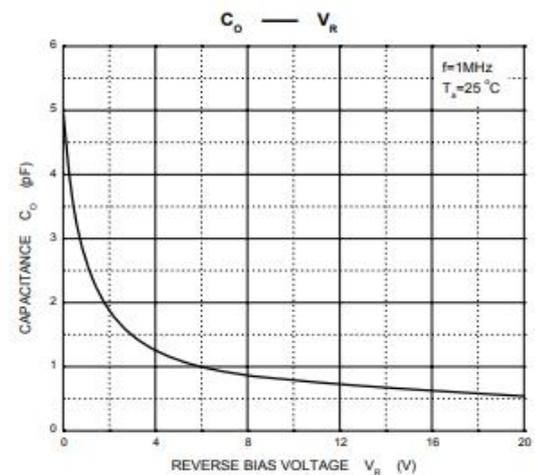
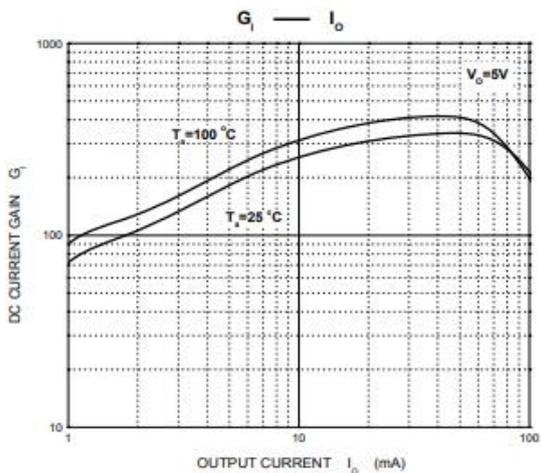
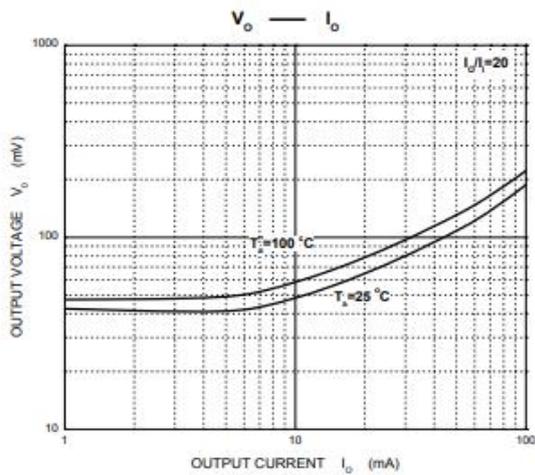
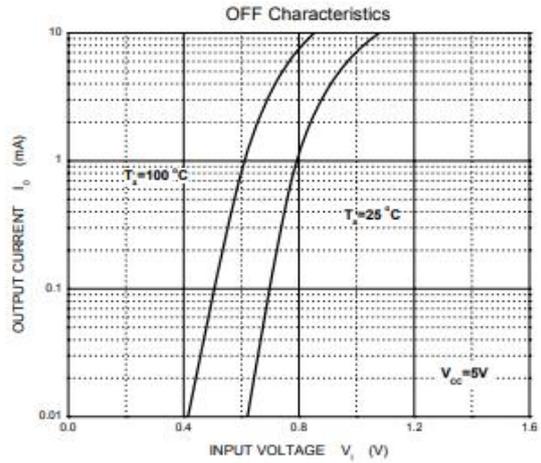
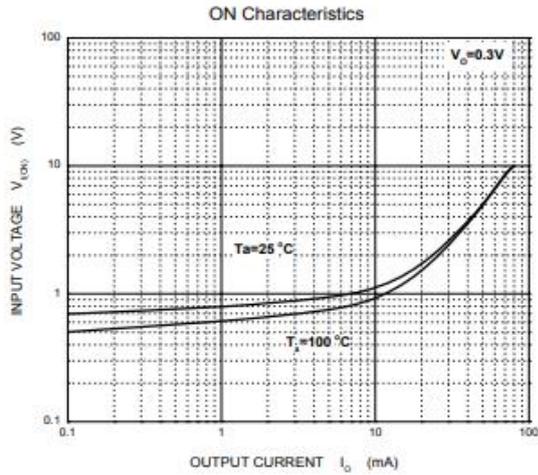
Part Number	MARKING	Package	Packing Method	Pack Quantity
DTC143ZE	E23	SOT-523	Reel	3000pcs/Reel
DTC143ZUA	E23	SOT-323	Reel	3000pcs/Reel
DTC143ZKA	E23	SOT-23-3L	Reel	3000pcs/Reel
DTC143ZCA	E23	SOT-23	Reel	3000pcs/Reel

MAXIMUM RATINGS(Ta=25°C unless otherwise noted)

Symbol	Parameter	Limits(DTC143Z□)				Unit
		E	UA	CA	KA	
V _{CC}	Supply Voltage	50				V
V _{IN}	Input Voltage	-5~+30				V
I _o	Output Current	100				mA
P _D	Power Dissipation	150	200	200	200	mW
T _J , T _{stg}	Operation Junction and Storage Temperature Range	-55~+150				°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	V _{I(off)}	V _{CC} =5V, I _o =100μA	0.5			V
	V _{I(on)}	V _o =0.3V, I _o =5mA			1.3	V
Output voltage	V _{O(on)}	I _o /I _i =5mA/0.25mA		0.1	0.3	V
Input current	I _i	V _i =5V			1.8	mA
Output current	I _{O(off)}	V _{CC} =50V, V _i =0			0.5	μA
DC current gain	G ₁	V _o =5V, I _o =10mA	80			
Input resistance	R ₁		3.29	4.7	6.11	kΩ
Resistance ratio	R ₂ /R ₁		8	10	12	
Transition frequency	f _T	V _o =10V, I _o =5mA, f=100MHz		250		MHz

Typical Characteristics


REVERSE VOLTAGE V_R (V) AMBIENT TEMPERATURE T_A ($^\circ\text{C}$)