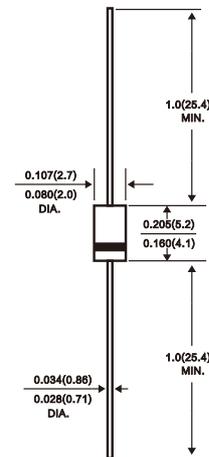


**Features**

- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability

**Mechanical Data**

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.34 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

**DO-41 (DO-204AL)**

**Dimensions in inches and (millimeters)**
**Maximum Ratings and Electrical Characteristics** @ $T_A=25^{\circ}\text{C}$  unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

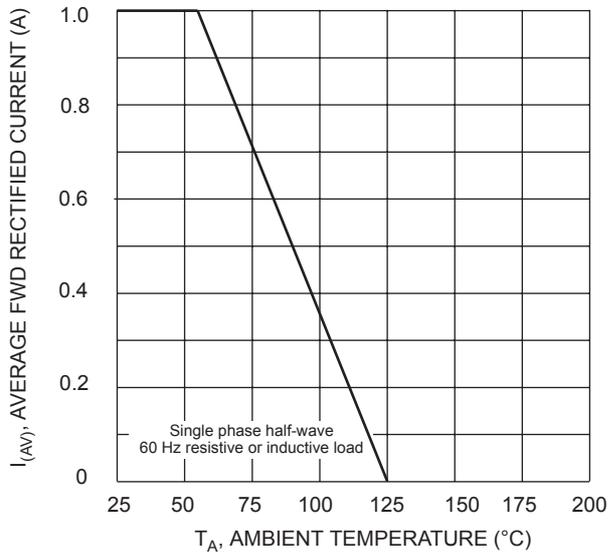
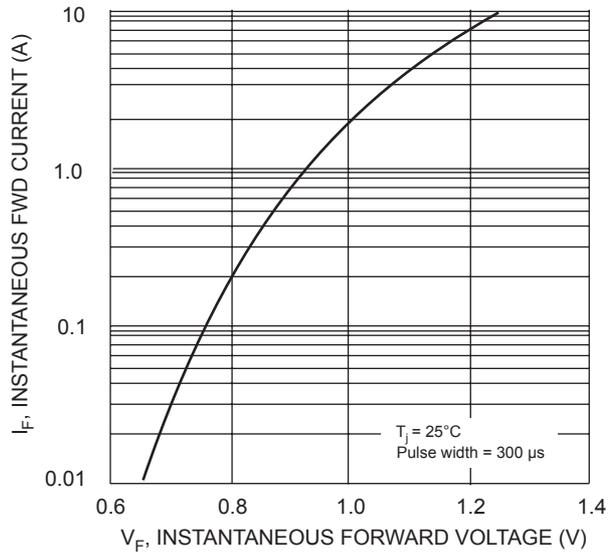
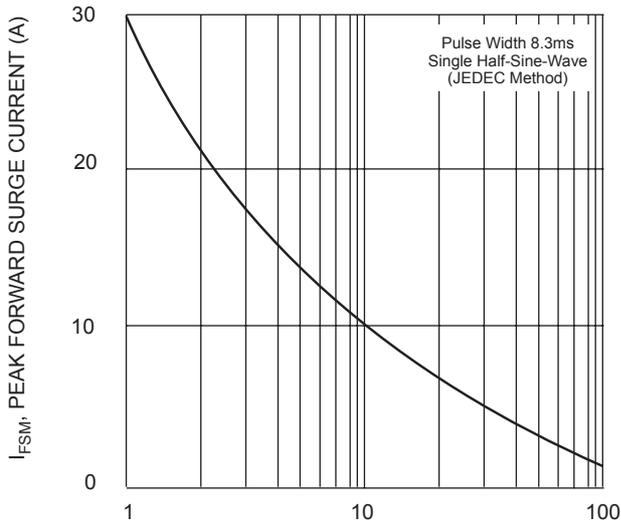
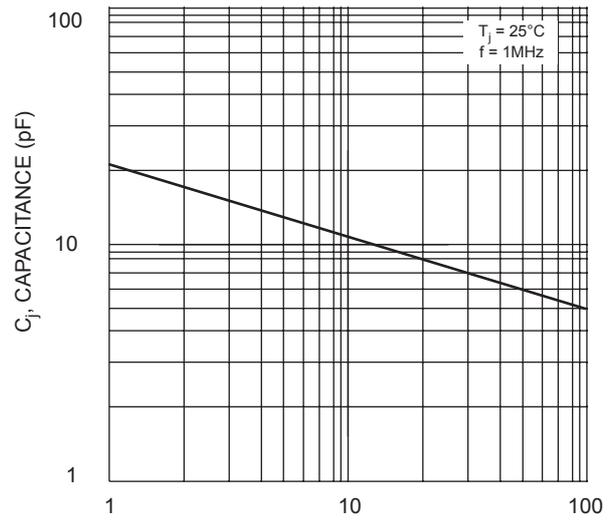
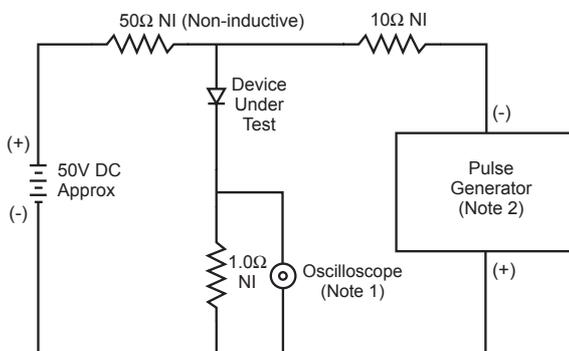
Characteristic	Symbol	BA157	BA158	BA159	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$				
Working Peak Reverse Voltage	$V_{RWM}$	400	600	1000	V
DC Blocking Voltage	$V_R$				
RMS Reverse Voltage	$V_{R(RMS)}$	280	420	700	V
Average Rectified Output Current (Note 1) @ $T_A = 55^{\circ}\text{C}$	$I_O$	1.0			A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30			A
Forward Voltage @ $I_F = 1.0\text{A}$	$V_{FM}$	1.2			V
Peak Reverse Current @ $T_A = 25^{\circ}\text{C}$ At Rated DC Blocking Voltage @ $T_A = 100^{\circ}\text{C}$	$I_{RM}$	5.0 100			$\mu\text{A}$
Reverse Recovery Time (Note 2)	$t_{rr}$	150	250	500	nS
Typical Junction Capacitance (Note 3)	$C_j$	15			pF
Operating Temperature Range	$T_j$	-65 to +125			$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150			$^{\circ}\text{C}$

**\*Glass passivated forms are available upon request**

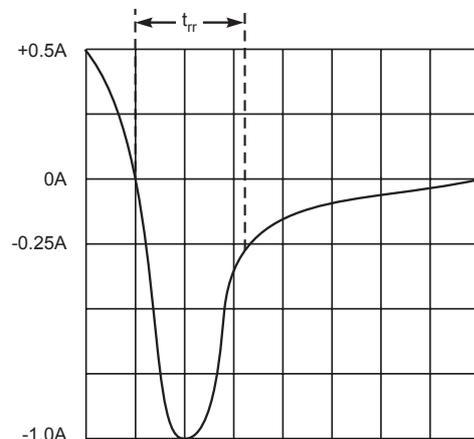
Note: 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case

2. Measured with  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $IRR = 0.25\text{A}$ . See figure 5.

3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.


**Fig. 1 Forward Derating Curve**

**Fig. 2 Typical Forward Characteristics**

**Fig. 3 Peak Forward Surge Current**

**Fig. 4 Typical Junction Capacitance**


- Notes:
1. Rise Time = 7.0ns max. Input Impedance = 1.0MΩ, 22pF.
  2. Rise Time = 10ns max. Input Impedance = 50Ω.



Set time base for 5/10ns/cm

**Fig. 5 Reverse Recovery Time Characteristic and Test Circuit**