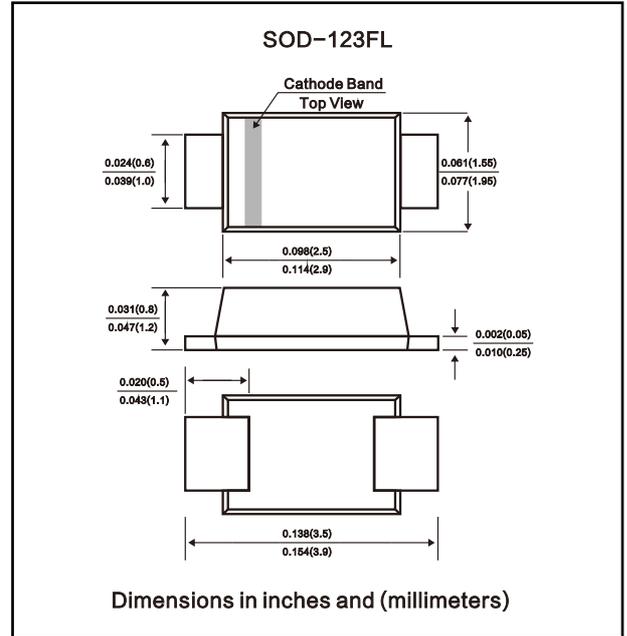


FEATURES

Silicon planar zener diodes.
 Low profile surface-mount package.
 Zener and surge current specification
 Low leakage current
 Excellent stability
 High temperature soldering guaranteed:
 /10 seconds, at terminals

MECHANICAL DATA

Case: JEDEC SOD-123FL molded plastic
 Polarity: Color band denotes positive end
 (cathode) except for bidirectional
 Marking code: see TABLE 1
 Weight: 0.006 ounces, 0.02 grams
 Mounting position: Any


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS
ABSOLUTE MAXIMUM RATINGS

Parameter	Test condition	Symbol	Value	Units
Power dissipation	$T_J = 80\text{ }^\circ\text{C}$ $T_A = 25\text{ }^\circ\text{C}$	P_{TOT}	2.3	W
		P_{TOT}	0.8 (note 1)	
Non-repetitive peak pulse power dissipation	100 μs square pulse(note 2)	P_{ZSM}	300	W
	10/1000 μs waveform (BZD27-C7V5P to BZD27-C75P)	P_{RSM}	150	

THERMAL CHARACTERISTICS

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air	R	θ_{JA}	180	K/W
Thermal resistance junction to lead	R	θ_{JL}	30	K/W
Maximum junction temperature		T_J	150	$^\circ\text{C}$
Storage temperature range	T	T_s	-55 to + 150	$^\circ\text{C}$

ELCTRICAL CHARACTERISTICS

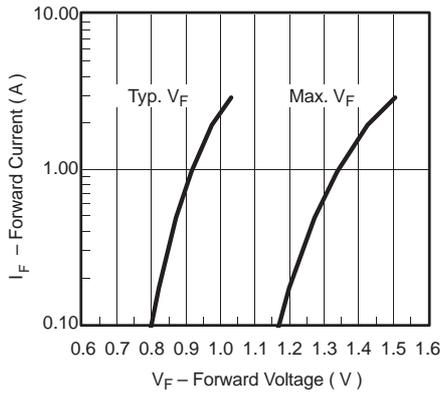
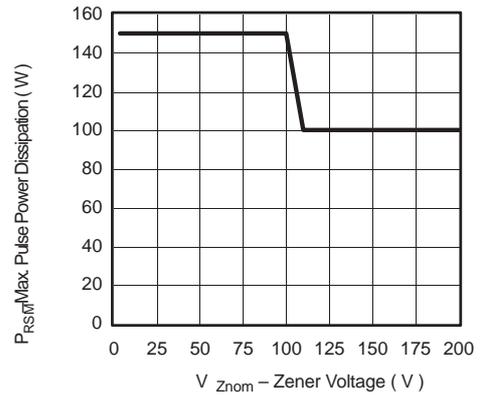
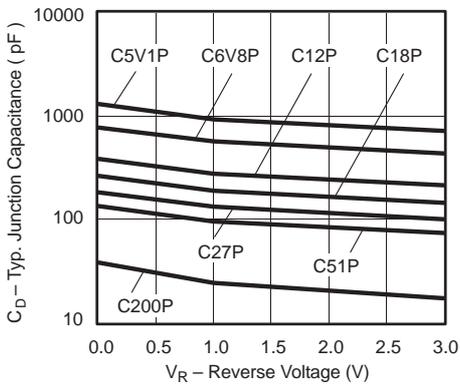
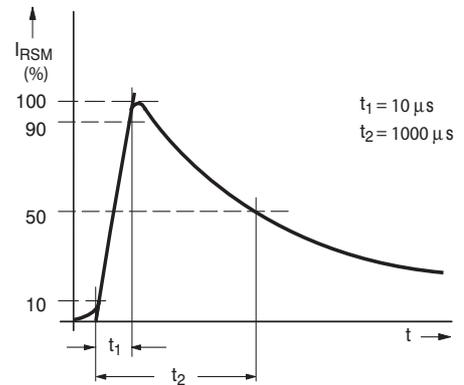
PARAMETER	Test condition	Symbol	Min	Typ	Max	Units
Forward voltage	$I_F = 0.2\text{ A}$	V_F			1.2	V

NOTES:

- Mounted on epoxy-glass PCB with 3X3 mm Cu pads ($\geq 40\mu\text{m}$ thick)
- $T_J = 25^\circ\text{C}$ prior to surge

VOLTAGE REGULATOR DIODES

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current	
	V _Z @I _{ZT}			Z _{ZT} @I _{ZT}		Z _{ZK} @I _{ZK}		I _R @V _R	
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V
BZD27C3V6P	3.6	3.42	3.78	8	100	400	1	100	1
BZD27C3V9P	3.9	3.71	4.10	8	100	400	1	50	1
BZD27C4V3P	4.3	4.09	4.52	7	100	400	1	25	1
BZD27C4V7P	4.7	4.47	4.94	7	100	500	1	10	1
BZD27C5V1P	5.1	4.85	5.36	6	100	550	1	5	1
BZD27C5V6P	5.6	5.32	5.88	4	100	600	1	10	2
BZD27C6V0P	6.0	5.70	6.30	3	100	600	1	8	2
BZD27C6V2P	6.2	5.89	6.51	3	100	700	1	5	2
BZD27C6V8P	6.8	6.46	7.14	3	100	700	1	10	3
BZD27C7V5P	7.5	7.13	7.88	2	100	700	0.5	50	3
BZD27C8V2P	8.2	7.79	8.61	2	100	700	0.5	10	3
BZD27C8V7P	8.7	8.27	9.14	3	50	700	0.5	10	4
BZD27C9V1P	9.1	8.65	9.56	4	50	700	0.5	10	5
BZD27C10P	10	9.50	10.50	4	50	700	0.25	7	7.5
BZD27C11P	11	10.45	11.55	7	50	700	0.25	4	8.2
BZD27C12P	12	11.40	12.60	7	50	700	0.25	3	9.1
BZD27C13P	13	12.35	13.65	10	50	700	0.25	2	10
BZD27C14P	14	13.30	14.70	10	50	700	0.25	2	11
BZD27C15P	15	14.25	15.75	10	50	700	0.25	1	11
BZD27C16P	16	15.20	16.80	15	25	700	0.25	1	12
BZD27C17P	17	16.15	17.85	15	25	750	0.25	1	13
BZD27C18P	18	17.10	18.90	15	25	750	0.25	1	13
BZD27C19P	19	18.05	19.95	15	25	750	0.25	1	14
BZD27C20P	20	19.00	21.0	15	25	750	0.25	1	15
BZD27C22P	22	20.90	23.10	15	25	750	0.25	1	16
BZD27C24P	24	22.80	25.20	15	25	750	0.25	1	18
BZD27C25P	25	23.75	26.25	15	25	750	0.25	1	19
BZD27C27P	27	25.65	28.35	15	25	1000	0.25	1	20
BZD27C28P	28	26.60	29.40	15	25	1000	0.25	1	21
BZD27C30P	30	28.50	31.50	15	25	1000	0.25	1	22
BZD27C33P	33	31.35	34.65	15	25	1000	0.25	1	24
BZD27C36P	36	34.20	37.80	40	10	1000	0.25	1	27
BZD27C39P	39	37.05	40.95	40	10	1000	0.25	1	30
BZD27C43P	43	40.85	45.15	45	10	1500	0.25	1	33
BZD27C47P	47	44.65	49.35	45	10	1500	0.25	1	36
BZD27C51P	51	48.45	53.55	60	10	1500	0.25	1	39
BZD27C56P	56	53.2	58.8	60	10	2000	0.25	1	43
BZD27C62P	62	58.9	65.1	80	10	2000	0.25	1	47
BZD27C68P	68	64.6	71.4	80	10	2000	0.25	1	51
BZD27C75P	75	71.25	78.75	100	10	2000	0.25	1	56

Figure 1. Forward Current vs. Forward Voltage

Figure 2. Maximum Pulse Power Dissipation vs. Zener Voltage

Figure 3. Typ. Diode Capacitance vs. Reverse Voltage

Figure 4. Non-Repetitive Peak Reverse Current Pulse Definition

Figure 5. Power Dissipation vs. Ambient Temperature
