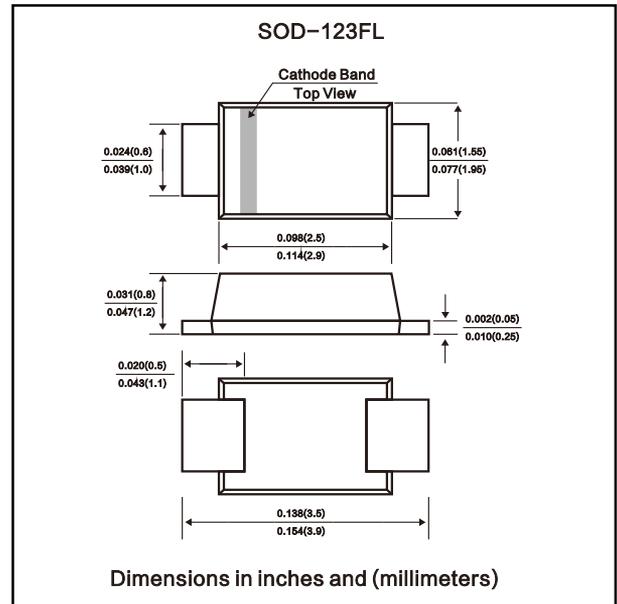


**FEATURES**

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

**MECHANICAL DATA**

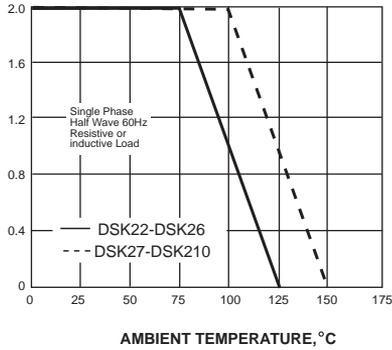
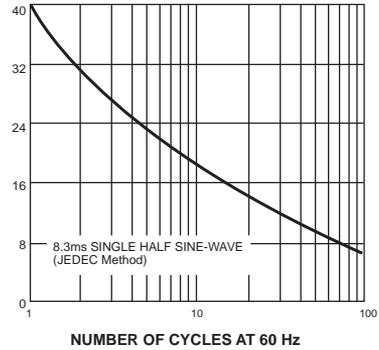
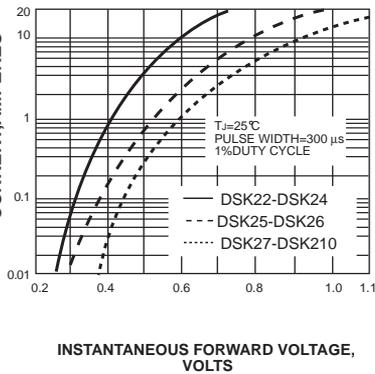
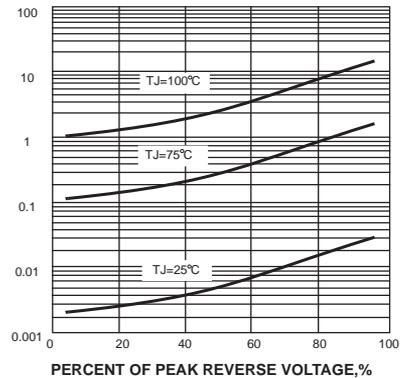
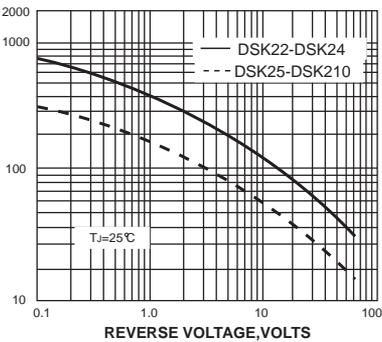
**Case:** JEDEC SOD-123FL molded plastic body  
**Terminals:** Solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.0007 ounce, 0.02 grams


**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	DSK22	DSK23	DSK24	DSK25	DSK26	DSK27	DSK28	DSK29	DSK210	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	70	80	90	100	VOLTS	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	49	56	63	70	VOLTS	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	70	80	90	100	VOLTS	
Maximum average forward rectified current	$I_{(AV)}$	2.0									Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	40.0									Amps	
Maximum instantaneous forward voltage at 2.0A	$V_F$	0.55			0.70			0.85			Volts	
Maximum DC reverse current at rated DC blocking voltage	$I_R$	10.0			0.5			5.0			mA	
Typical junction capacitance (NOTE 1)	$C_J$	220			80						pF	
Operating junction temperature range	$T_J$	-50 to +125					-50 to +150					°C
Storage temperature range	$T_{STG}$	-50 to +150										°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

**SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER**
**AVERAGE FORWARD RECTIFIED CURRENT, AMPERES**
**FIG. 1- FORWARD CURRENT DERATING CURVE**

**PEAK FORWARD SURGE CURRENT, AMPERES**
**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

**INSTANTANEOUS FORWARD CURRENT, AMPERES**
**FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

**INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES**
**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

**JUNCTION CAPACITANCE, pF**
**FIG. 5-TYPICAL JUNCTION CAPACITANCE**


The cruve graph is for reference only, can't be the basis for judgment