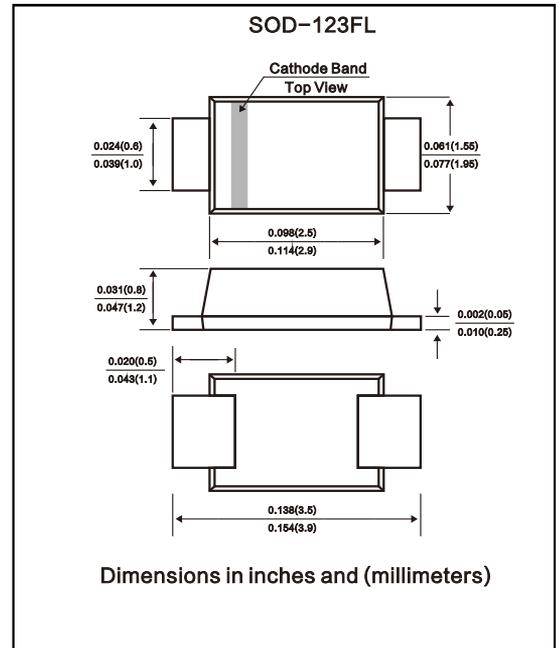


**FEATURES**

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

**MECHANICAL DATA**

**Case:** JEDEC SOD-123FL molded plastic body  
**Terminals:** Solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.0007 ounce, 0.02 grams


**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**


Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	DSS12 D12	DSS13 D13	DSS14 D14	DSS15 D15	DSS16 D16	DSS17 D17	DSS18 D18	DSS19 D19	DSS110 D110	DSS115 D115	DSS120 D120	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	70	80	90	100	150	200	VOLTS	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	49	56	63	70	105	140	VOLTS	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	70	80	90	100	150	200	VOLTS	
Maximum average forward rectified current	$I_{(AV)}$	1.0											Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	25.0											Amps	
Maximum instantaneous forward voltage at 1.0A	$V_F$	0.55			0.70			0.85			0.95		Volts	
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$	0.5					5.0					2.0		mA
Typical junction capacitance (NOTE 1)	$C_J$	110				80								pF
Operating junction temperature range	$T_J$	-55 to +125						-55 to +150						°C
Storage temperature range	$T_{STG}$	-55 to +150											°C	

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

**FIG. 1- FORWARD CURRENT DERATING CURVE**

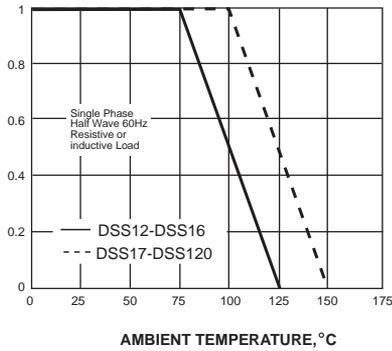


PEAK FORWARD SURGE CURRENT, AMPERES

**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

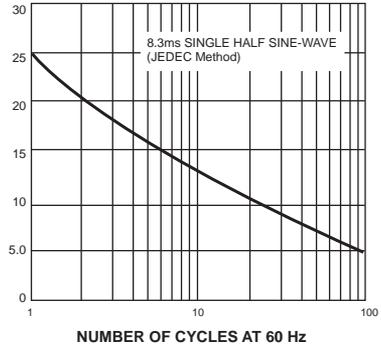


INSTANTANEOUS FORWARD CURRENT, AMPERES

**FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

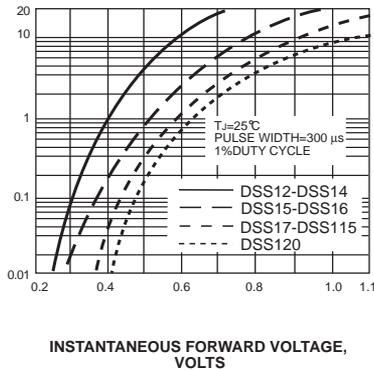


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

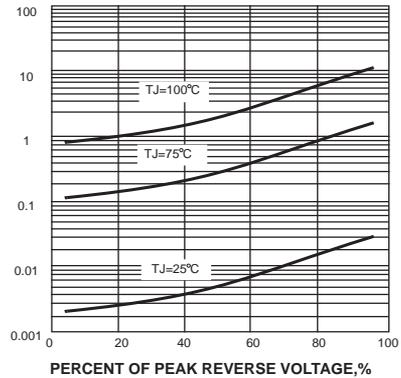

JUNCTION CAPACITANCE, pF

**FIG. 5-TYPICAL JUNCTION CAPACITANCE**

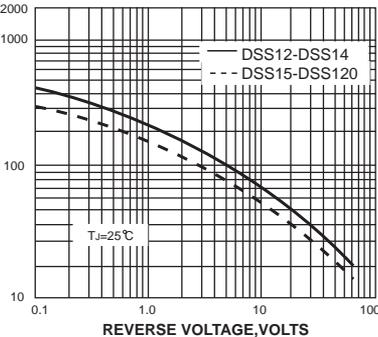

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!